


填料系列

步步为赢

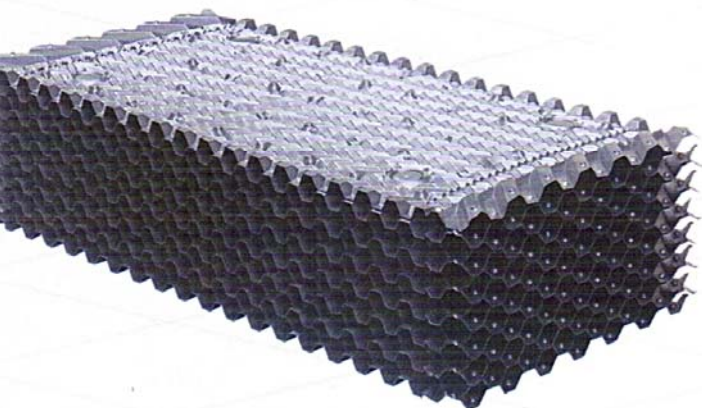

ML-01 (5° 30' 倾斜)

规格(HxL): 500x900
500x1000
500x1230
500x1100




ML-02

规格(HxL): 1000x1000
1000x1230 (5° 30' 倾斜)



ML-03

规格(HxL): 500x900
500x1000
500x1100

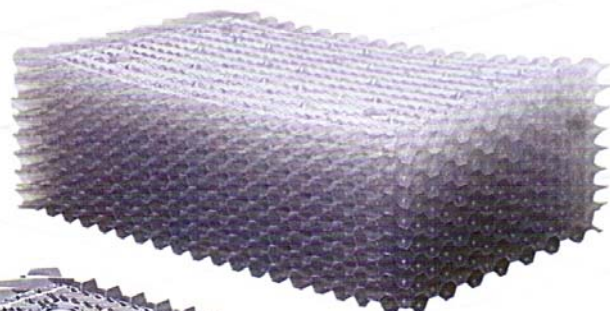


ML-04

规格(HxL): 620x900
620x1000
620x1100





品质一流

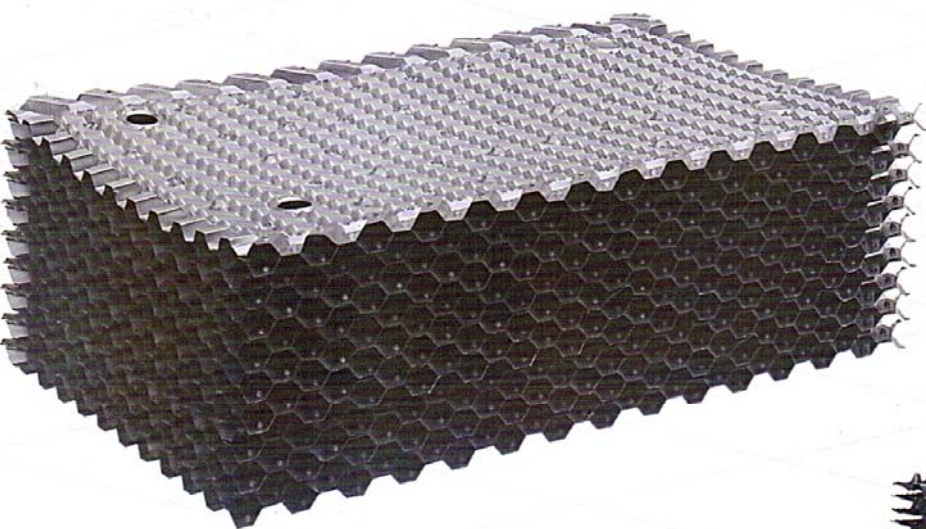

ML-05

规格(HxL): 1080x620



ML-07

规格(HxL): 800x750
400x750




ML-06

规格(HxL): 610x1220
305x1220




ML-08

规格(HxL): 800x750
400x750

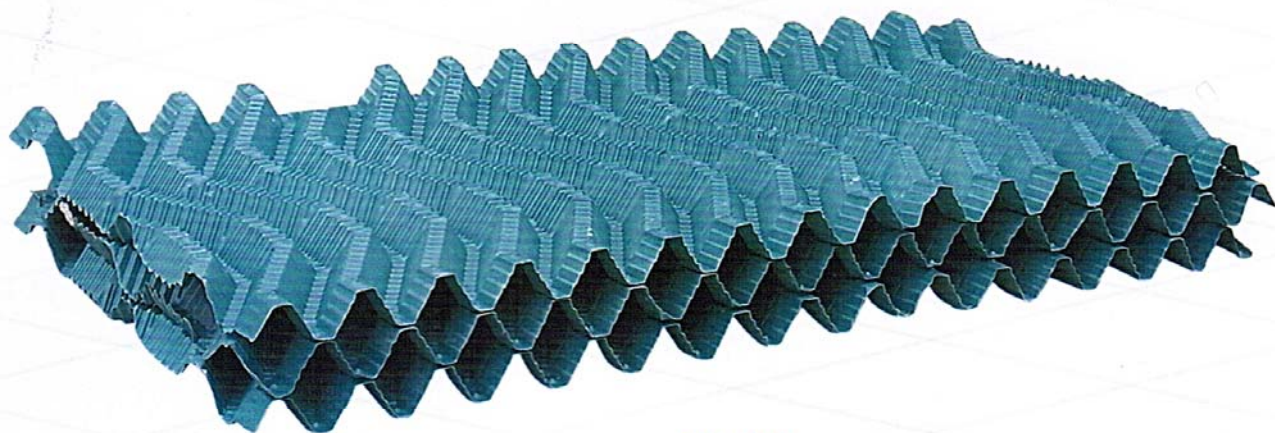

ML-09

规格(HxL): 500x1000

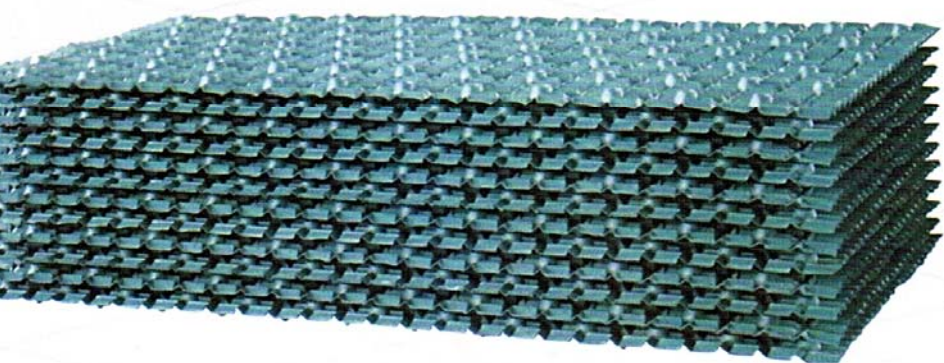

ML-10

规格(HxL): 500x1000



ML-11 5° 30' 倾斜

规格(HxL): 宽度915x长度任意
宽度1230x长度任意


优良品质



ML-12 收水填料
规格(HxL): 50x1100




ML-13 高效收水器
规格(HxL): 140x1000
140x1200

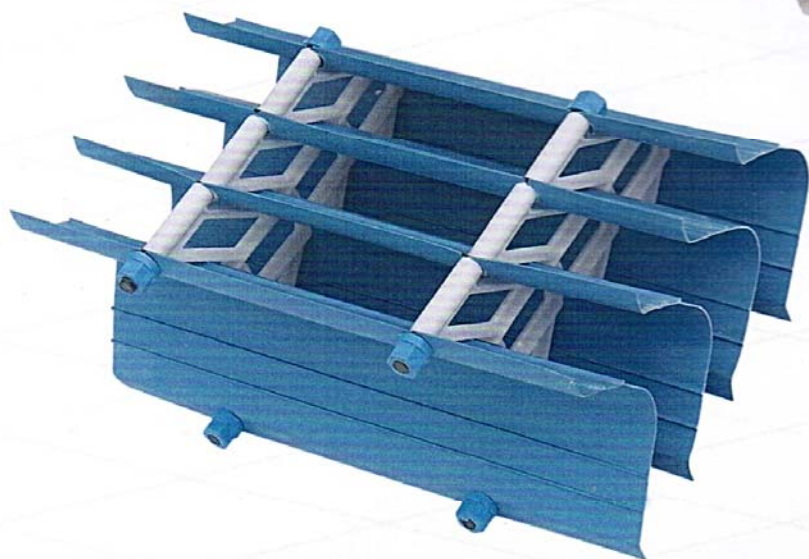


ML-14 收水填料
规格(HxL): 115x长度任意
140x长度任意



ML-15
高温填料

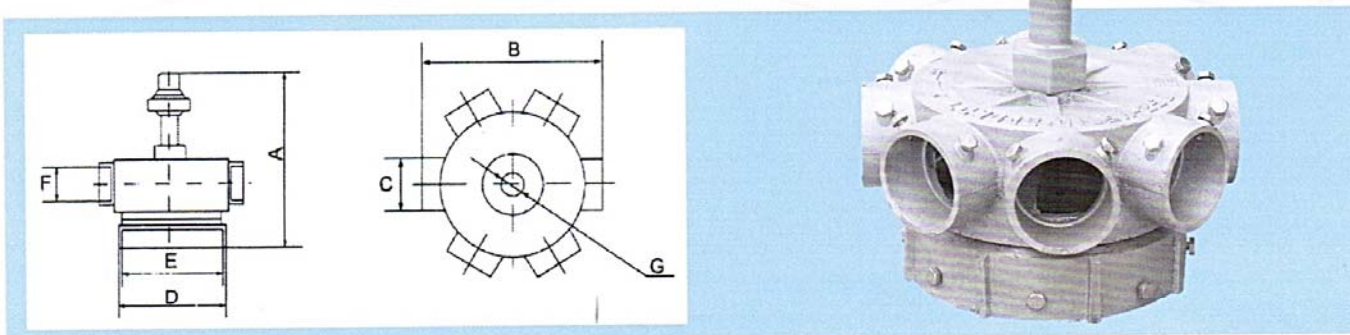

型号 (寸) Model (inch)	孔数 Hole	外形尺寸 Dimensions				安装尺寸 Installation dimensions		
		A	B	C	D	G	F	E
1.5	4	125	80	Φ30	56	2X5+字槽 (Cross Solt)	G1/2 寸 (Inch)	G1.5 寸 (Inch)
2	4	142	95	Φ35	68	2X5+字槽 (Cross Solt)	G3/4 寸 (Inch)	G2 寸 (Inch)
2	6	142	95	Φ35	68	2X5+字槽 (Cross Solt)	G3/4 寸 (Inch)	G2 寸 (Inch)
2.5	4	165	120	Φ45	87	2X5+字槽 (Cross Solt)	G1 寸 (Inch)	G2.5 寸 (Inch)
3	4	182	137	Φ48	101	2X5+字槽 (Cross Solt)	G1 1/2 /Φ49	G3/Φ90
3	6	182	137	Φ58	101	2X5+字槽 (Cross Solt)	G1 1/2 寸 (Inch)	G3 寸 (Inch)
4	6	270	168	Φ58	124	Φ22	G1 1/2 寸 (Inch)	G4 寸 (Inch)
4	4	320	200	Φ58	Φ136	Φ22	Φ61	G4/Φ115
5	4	350	240	Φ73	Φ160	Φ22	Φ77	G5/Φ141
5	6	340	210	Φ89	Φ160	Φ22	Φ61	G5/Φ141
6	6	370	230	Φ80	Φ185	Φ22	Φ77	G6/Φ167
6	4	380	260	Φ91	Φ192	Φ22	Φ90	G61/Φ167
8	6	370	310	Φ104	Φ245	Φ22	Φ90	G8/Φ218
10	8	400	380	Φ104	Φ305	Φ29	Φ90	G10/Φ269
12	10	530	510	Φ131	Φ340	Φ29	Φ115	G12/Φ320

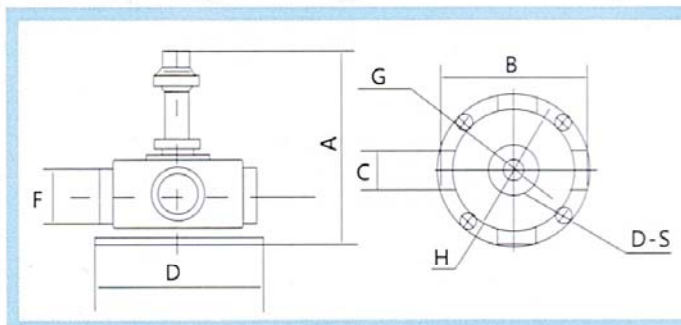

自动布水器规范表

Specification sheet Automatic Water Dimensions

型号 Model	1.5 寸 (Inch)	2 寸 (Inch)	2.5 寸 (Inch)	3 寸 (Inch)	4 寸 (Inch)	5 寸 (Inch)	6 寸 (Inch)	8 寸 (Inch)	10 寸 (Inch)	12 寸 (Inch)
适用塔类型 For tower type	5T~10T	15T~20T	20T~30T	30T~50T	50T~80T	80T~125T	150T	200T~300T	400T~500T	600T~1000T
每分钟转数 RPM	7-12	7-12	7-12	5-8	5-8	5-8	5-8	2.5-5	2.5-4	2-3

法兰式自动布水器外形安装尺寸


Flanged automatic water distributor installation dimensions

单位 (Unit) :mm

型号 (寸) Model(Inch)	孔数 Hole	外形尺寸 Dimensions				安装尺寸 Installation dimensions			
		A	B	F	D	H	C	G	G-S
6	4	280	220	Φ100	Φ245	Φ208	Φ90	Φ22	6/Φ11
6	6	290	230	Φ90	Φ245	Φ208	Φ77	Φ22	6/Φ11
8	6	340	280	Φ105	Φ310	Φ264	Φ90	Φ29	6/Φ12.5
10	8	340	340	Φ105	Φ360	Φ320	Φ90	Φ32.5	6/Φ12.5
12	10	485	510	Φ130	Φ460	Φ420	Φ114.8	Φ32.5	8Φ12.5

备注：规格不同另行定制

Note:be customized with different specifications

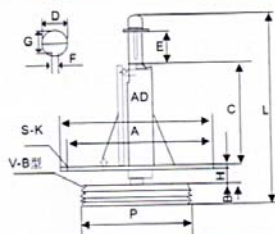


冷却塔专用减震器(方塔)

Cooling tower dedicated reducer(square tower)

单位 (Unit) :mm

规格 Size	外形尺寸 Dimensions							安装尺寸 Installation dimensions					
(#)	P	L	B	AD	E	C	H	A	D	G	F	S-K	V-B(型) V-B(Trough)
T5#	Φ320	605	65	Φ460	78	362	55	Φ410	Φ34	30	8	4-Φ14	3-B
T6#	Φ430	690	85	Φ590	105	360	55	Φ540	Φ38	34	8	4-Φ14	4-B
T8#	Φ430	700	85	Φ590	105	360	55	Φ540	Φ38	34	8	4-Φ14	4-B
T10#	Φ430	730	85	Φ590	120	360	55	Φ540	Φ50	45	12	4-Φ14	4-B
T12#	Φ500	800	123	Φ595	135	420	55	Φ560	Φ50	45	12	4-Φ14	6-B

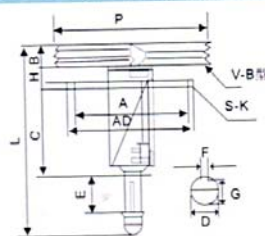

冷却塔专用减震器(圆塔)

Cooling tower dedicated reducer(round tower)

单位 (Unit) :mm

规格 Size	外形尺寸 Dimensions							安装尺寸 Installation dimensions					
(#)	P	L	B	AD	E	C	H	A	D	G	F	S-K	V-B(型) V-B(Trough)
4#	Φ305	390	43	Φ225	76	168	50	Φ200	Φ28	25	8	4-Φ12.5	2-B
5#	Φ350	450	45	Φ305	78	173	55	Φ265	Φ34	30	8	4-Φ12.5	2-B
6#	Φ456	490	67	Φ352	105	201	60	Φ300	Φ38	34	8	4-Φ14	3-B
8#	Φ458	565	85	Φ420	120	213	60	Φ390	Φ50	45	12	6-Φ16	4-B
10#	Φ608	700	91	Φ490	135	310	62	Φ450	Φ50	45	12	4-Φ16	4-B
12#	Φ660	730	111	Φ490	145	310	62	Φ450	Φ60	55	12	4-Φ16	5-B
14#	Φ660	750	131	Φ490	156	313	62	Φ450	Φ75	67.5	20	8-Φ16	6-B
16#	Φ660	760	131	490Φ	156	313	62	Φ450	Φ75	67.5	20	8-Φ16	6-B